

# APEX



## PENDANT/SURFACE MOUNTED DOWNLIGHT

PROMAX



### SPECIFICATIONS:

TYPE:	SURFACE MOUNTED/PENDANT
VOLTAGE:	120V
WATTAGE:	8/12/20/25/30/40/50/55W
OUTPUT LUMEN:	80LM/W
UGR	<19
CCT:	2700K/3000K/4000K/5000K
BEAM ANGLE:	15°/30°/45°
SWIVELING	NO
CRI:	90/95
DIMMABLE:	YES
HOUSING COLOR	BLACK/WHITE
REFLECTOR COLOR	BLACK/WHITE/SILVER
IP:	20
LIFE SPAN:	50000 HOURS

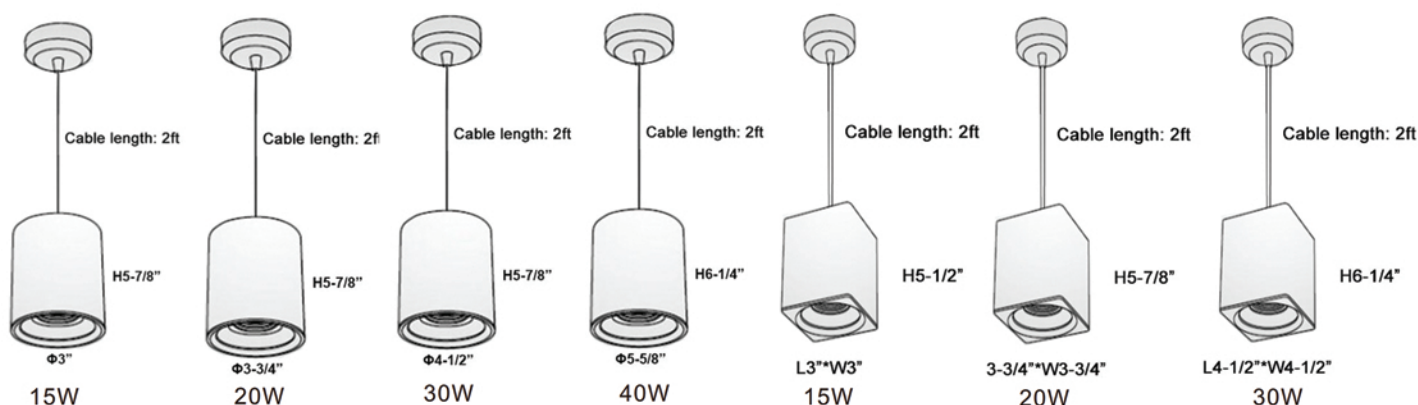

Octagon



**PREMIER**

3740 William St, Burnaby, BC V5C 3H7

Phone: +1 (604) 294-2334, Toll free: +1 (877) 294-2334, Fax: +1 (604) 294-2126

www.premierlight.ca

PROMAX APEX

LAST UPDATE: JULY, 2023

PAGE 1 of 2

## APPLICATIONS:

PENDANT OR SURFACE MOUNTED DOWNLIGHT, SUITABLE FOR A VARIETY OF APPLICATIONS INCLUDING BUT NOT LIMITED TO GUEST ROOMS, CORRIDORS, RESTAURANTS, MEETING ROOMS, CLUBS, HALLS AND HOTEL ENTRANCES.

ETL CERTIFIED, FIVE YEARS WARRANTY.



## ORDERING INFORMATION:

Example: PM-APEX-P-R-30-2700-30-90-T-B-B

SERIES	TYPE	SHAPE	WATTS	COLOUR TEMP.	BEAM ANGLE	CRI	DIMMING
PM-APEX	P: Pendant	Square	15	2700	15	90	T: Triac
	S: Surface Mounted	Round	20	3000	30	95	V: 0-10V
			30	4000	45		D:Dali
			40	5000			
FRAME COLOR	REFLECTOR COLOR						
W: White	W: White						
B: Black	B: Black						
	S: Silver						

80 lm/W, 120VAC