

CANOPUS


SOFFIT DOWNLIGHT

PROMAX



SPECIFICATIONS:

VOLTAGE:	110V-277V
WATTAGE:	12W/15W/30W/40W/50W/55W
OUTPUT LUMEN:	80LM/W
CCT:	2700K/3000K/4000K/5000K
BEAM ANGLE:	15°/30°/45°
CRI:	90/95
DIMMABLE:	TRIAC/0-10V/DALI
HOUSING COLOR	WHITE
REFLECTOR COLOR	BLACK/WHITE
IP:	54
LIFE SPAN:	50000 HOURS

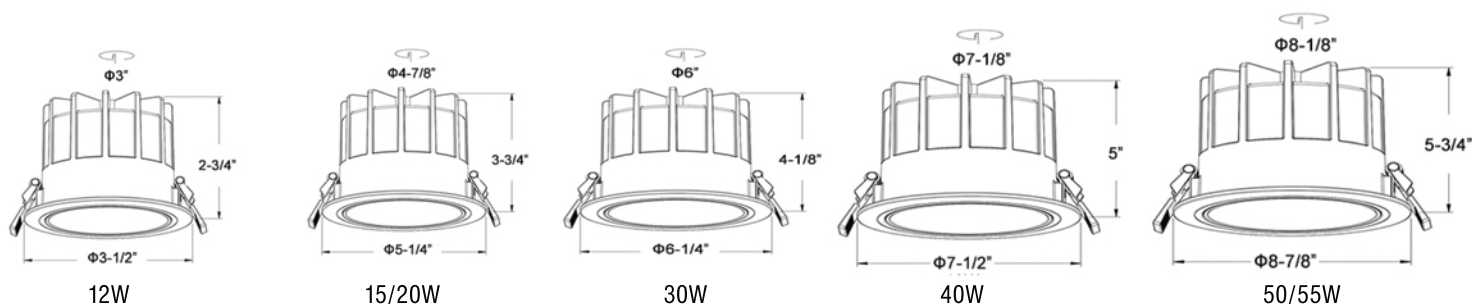

APPLICATIONS:

SOFFIT LIGHTING FOR WET LOCATIONS. ALSO SUITABLE FOR GUEST ROOMS, CORRIDORS, RESTAURANTS, MEETING ROOMS, ETC.

ETL CERTIFIED, FIVE YEARS WARRANTY.



ORDERING INFORMATION:

Example: PM-CANOPUS-30-2700-45-90-T-W-B

SERIES	WATTS	COLOR TEMP.	BEAM ANGLE	CRI	DIMMING	FRAME COLOR	REFLECTOR COLOR
PM-CANOPUS	12	2700	15	90	T: Triac	W: White	W: White
	15	3000	30	95	V: 0-10V		B: Black
	30	4000	45		D: Dali		
	40	5000					
	50						
	55						

120/277VAC, 80LM/W

PREMIER

3740 William St, Burnaby, BC V5C 3H7

Phone: +1 (604) 294-2334, Toll free: +1 (877) 294-2334, Fax: +1 (604) 294-2126

www.premierlight.ca

PROMAX CANOPUS

LAST UPDATE: JULY, 2023

PAGE 1 of 1