XVW02G

PRIME

RECESSED TRIM/TRIMLESS DOWNLIGHT



SPECIFICATIONS:

SIZE: 3"/4" SQUARE, 3"/4"/5"/6" ROUND

VOLTAGE: 120V

WATTAGE: 8-12/15-20/25-30/30-35W

OUTPUT LUMEN: 85LM/W UGR <13

CCT: 2700K/3000K/3500K/4000K

BEAM ANGLE: 11°/24°/38°/60°

SWIVELING YES
CRI: 90/95
DIMMABLE: YES


HOUSING COLOR BLACK/WHITE

REFLECTOR COLOR BLACK (DARK LIGHT)/WHITE/SILVER


LENS HONEYCOMB/OPAL

IP: 20

LIFE SPAN: 50000 HOURS

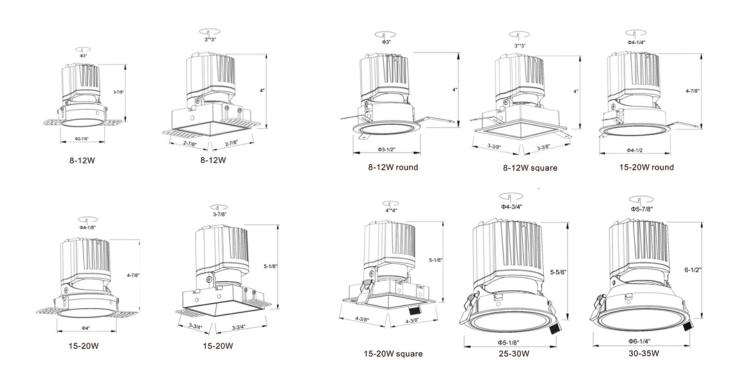

LIGHT DISTRIBUTION:

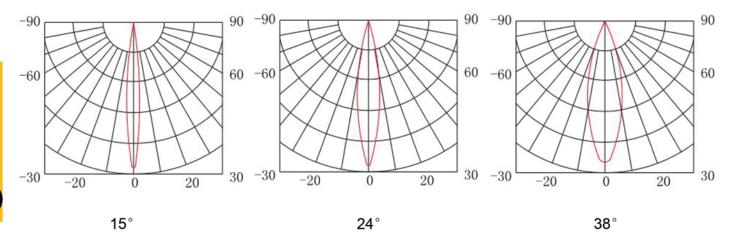

APPLICATIONS:

TRIM/TRIMLESS RECESSED DOWNLIGHT, SUITABLE FOR A VARIETY OF APPLICATIONS INCLUDING BUT NOT LIMITED TO GUEST ROOMS, CORRIDORS, RESTAURANTS, MEETING ROOMS, CLUBS, HALLS AND HOTEL ENTRANCES.

ETL CERTIFIED, FIVE YEARS WARRANTY.



ORDERING INFORMATION:

Example: PM-PRIME-TL-3S-2700-15-0-90-V-B-B

Example. This Think Te do 2700 To 0 30 V b b										
	SERIES	TYPE	SIZE	COLOR TEMP.	BEAM ANGLE	OPTICS	CRI	DIMMING	REFLECTOR COLOR	FRAME COLOR
	PM-PRIME	T: Trim TL: Trimless	3R: 3 1/2" Round 4R: 4 1/2" Round 5R: 5 1/8" Round 6R: 6 1/4" Round 3S: 3 3/8" Square 4S: 4 3/8" Square	2700 3000 3500 4000	11 24 38 60	O: Opal H: Honeycomb	90 95	T: Triac V: 0-10V D:Dali	W: White B: Black S: Silver	W: White B: Black
			45: 4 3/6 Square							

85lm/W, 120VAC

