

DOT06


MAGNETIC TRACK SERIES



DISTRIBUTION


3000K 80Ra

12°




h(m)	E(lx)	Φ(m)
1	8025	Φ0.19
2	2006	Φ0.39
3	891	Φ0.59
4	501	Φ0.79
5	321	Φ0.99

48°




h(m)	E(lx)	Φ(m)
1	1606	Φ0.85
2	401	Φ1.71
3	178	Φ2.57
4	100	Φ3.43
5	64	Φ4.29

34°



h(m)	E(lx)	Φ(m)
1	2660	Φ0.57
2	664	Φ1.14
3	295	Φ1.72
4	166	Φ2.29
5	106	Φ2.86

DIMENSIONS




SPECIFICATIONS

Model No.	Dot06
Power Consumption(±10%)	8W
Input Voltage	24VDC
Driver Type	Constant Current (CC)
Dimming	Yes
Luminous Flux (±10%)	790lm
Efficacy(4000K Ra70)	95lm/W
Correlated Color Temperature	4000K (2700, 3000K, 5000K optional)
Color Rendering Index	Ra80 (Ra90 optional)
Beam Angle	°48 , °34 , °12
UGR level	NA
Mounting Option	Track Mounted
Material	Aluminum Alloy Body, Polycarbonate Optical Lens
Finish	Powder Coating
Fixture Color	Black/White
EPA	NA
IK Rating	NA
IP Rating	IP20
Life Time of LED @Ta=25°C	50000 Hours
Warranty	5 Years
Application	Residential, Retail, Office, etc.

■ Sandy Black □ Sandy White



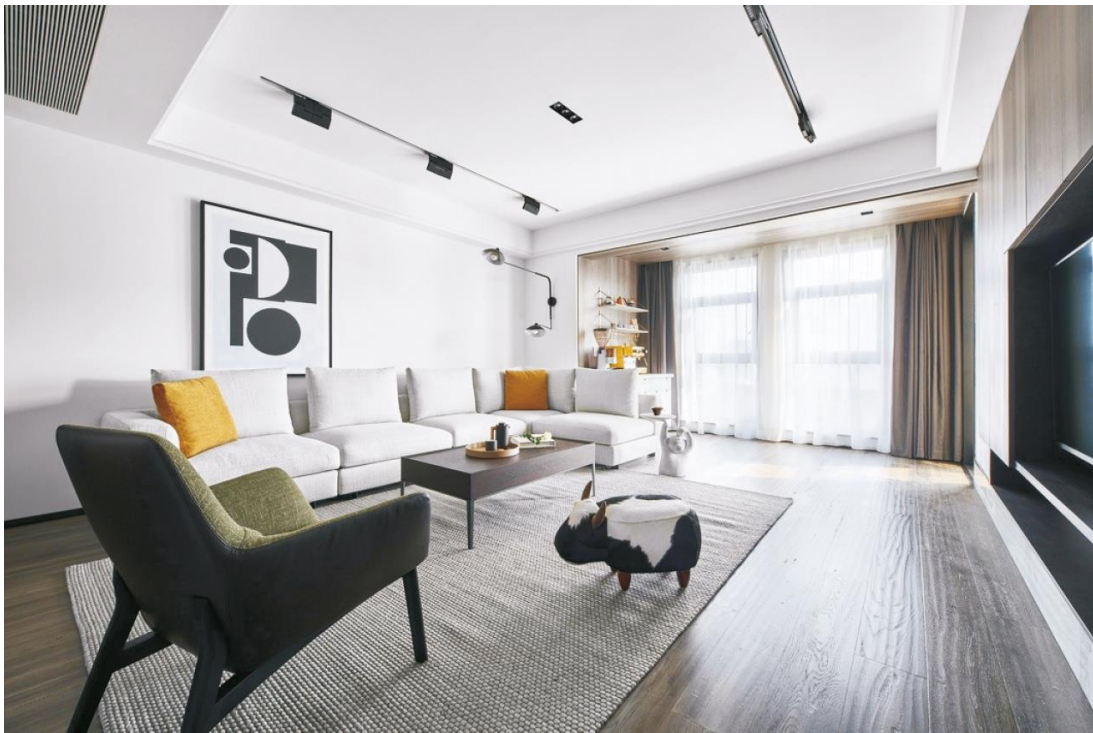

ORDERING INFORMATION

EXAMPLE: PR-MT-DOT06-3000-80-D-34

SERIES	CCT(K°)	CRI	DIMMING	BEAM ANGLE
PR-MT-DOT06	2700	80	D: Dali	12°
	3000	90	V: 0-10V	34°
	4000		O: None	48°
	5000			