


Maggie Senior

series



- Recessed



- Surface
- Pendant
- Recessed





- TrackS-A**
- Surface
 - Pendant
 - Recessed






Model	Power	Install	Length
1 Meter profile	200W max	Surface/Pendant/Recessed	1000mm
2 Meter profile	200W max	Surface/Pendant/Recessed	2000mm
3 Meter profile	200W max	Surface/Pendant/Recessed	3000mm

Sandy Black Sandy White Golden Black bronze

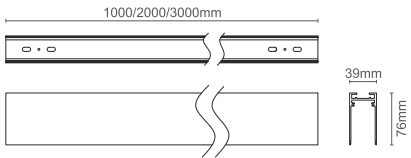

Model	Power	Install	Length
1 Meter profile	200W max	Recessed	1000mm
2 Meter profile	200W max	Recessed	2000mm
3 Meter profile	200W max	Recessed	3000mm

Sandy Black Sandy White Golden Black bronze



CORNER

L Corner

Sandy Black Sandy White



Inner Corner

Sandy Black Sandy White



Outer Corner

Sandy Black Sandy White



T corner

Sandy Black Sandy White




45D corner

Sandy Black Sandy White



CROSS corner


Sandy Black Sandy White



CORNER


L Corner-R

Sandy Black Sandy White




Inner Corner-R

Sandy Black Sandy White




Outer Corner-R

Sandy Black Sandy White



T Corner-R

Sandy Black Sandy White



POWER FEED

Input terminal


Sandy Black Sandy White



POWER FEED

Input terminal-R

Sandy Black Sandy White




ACCESSORIES


Recessed kit

Sandy Black

Sandy White




Recess mounting kit for magnetic track.




Pendant kit-A

Sandy Black

Sandy White




Suspension 1.2meters with electrical wire (1 pc).




Pendant kit-B

Sandy Black

Sandy White



Suspension 1.2meters (1pc).



Track connector

Sandy Black

Sandy White




Profile connection.




Power plate 65mm

Sandy Black

Sandy White



Electric connection, with 2 pins.



New surface mounted kits

Sandy Black

Sandy White




New surface mounted for magnetic track.


Track cover

Sandy Black

Sandy White




Track cover 1 meter.




Track driver box

Sandy Black

Sandy White




Can connect to the track profile directly.




Driver box

Sandy Black

Sandy White




Empty box.




End cap

Sandy Black

Sandy White




End cap.



Pin2

Sandy Black

Sandy White



Pin connector for electric connection.


Pin3

Sandy Black

Sandy White



Pin connector for electric connection.



DOT01

DC24V
INPUT

DIMMABLE

CE

RoHS

Energy Star

IP20

BAL


POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
2W	> 80 > 90	< 3	2700K 3000K 4000K	12° 34° 48°	120Lm

Sandy Black

Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

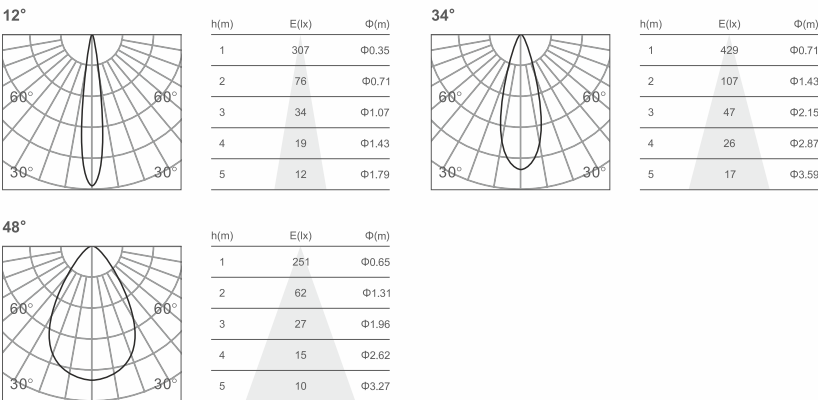

DOT03

DC24V
INPUT

DIMMABLE

CE

RoHS

Energy Star

IP20

BAL


POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80 > 90	< 3	2700K 3000K 4000K	12° 34° 48°	380Lm

Sandy Black

Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

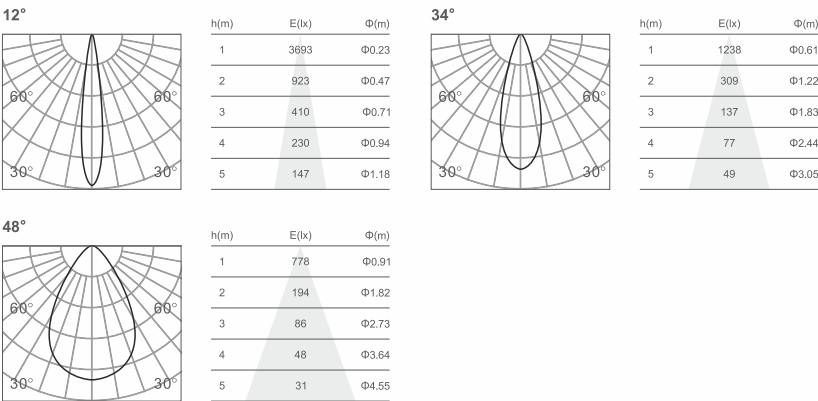



DOT06




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	12°	790Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTRIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	8025	Φ0.19
2	2006	Φ0.39
3	891	Φ0.59
4	501	Φ0.79
5	321	Φ0.99



h(m)	E(lx)	Φ(m)
1	2660	Φ0.57
2	664	Φ1.14
3	295	Φ1.72
4	166	Φ2.29
5	106	Φ2.86



h(m)	E(lx)	Φ(m)
1	1606	Φ0.85
2	401	Φ1.71
3	178	Φ2.57
4	100	Φ3.43
5	64	Φ4.29



DOT12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	12°	1550Lm
	> 90		3000K	34°	
			4000K	48°	


 Sandy Black  Sandy White

LIGHT DISTRIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	12054	Φ0.25
2	3013	Φ0.51
3	1339	Φ0.77
4	753	Φ1.03
5	482	Φ1.29



h(m)	E(lx)	Φ(m)
1	5127	Φ0.55
2	1282	Φ1.11
3	569	Φ1.67
4	320	Φ2.23
5	205	Φ2.78



h(m)	E(lx)	Φ(m)
1	3197	Φ0.84
2	799	Φ1.69
3	355	Φ2.54
4	199	Φ3.39
5	127	Φ4.24



Linear08




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80	< 3	2700K	Diffuse	280Lm
	> 90		3000K		
			4000K		


 Sandy Black  Sandy White

LIGHT DISTRIBUTION

3000K 80Ra



h(m)	E(lx)	Φ(m)
1	105.5	Φ2.60
2	26.3	Φ5.20
3	11.7	Φ7.80
4	6.5	Φ10.40
5	4.2	Φ13.00



Linear16




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
7W	> 80	< 3	2700K	Diffuse	500Lm
	> 90		3000K		
			4000K		


 Sandy Black  Sandy White

LIGHT DISTRIBUTION

3000K 80Ra



h(m)	E(lx)	Φ(m)
1	236	Φ2.59
2	59	Φ5.19
3	26	Φ7.79
4	14	Φ10.39
5	9	Φ12.99






Linear32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
13W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	980Lm

 Sandy Black  Sandy White


LIGHT DISTRIBUTION

3000K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	426	Φ2.51
2	106	Φ5.02
3	47	Φ7.53
4	26	Φ10.04
5	17	Φ12.55



Linear96




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
39W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	2850Lm

 Sandy Black  Sandy White


LIGHT DISTRIBUTION

3000K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	889	Φ2.23
2	222	Φ4.46
3	98	Φ6.69
4	55	Φ8.92
5	35	Φ11.15



Linear64




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
26W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	1900Lm

 Sandy Black  Sandy White


LIGHT DISTRIBUTION

3000K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	479	Φ2.65
2	119	Φ5.30
3	53	Φ7.95
4	29	Φ10.60
5	19	Φ13.25





Fold03




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80	< 3	2700K	12°	380Lm
	> 90		3000K	34°	
			4000K	48°	


Sandy Black Sandy White

LIGHT DISTRIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	3683	Φ0.23
2	923	Φ0.47
3	410	Φ0.71
4	230	Φ0.94
5	147	Φ1.18



h(m)	E(lx)	Φ(m)
1	1238	Φ0.61
2	309	Φ1.22
3	137	Φ1.83
4	77	Φ2.44
5	49	Φ3.05



h(m)	E(lx)	Φ(m)
1	778	Φ0.91
2	194	Φ1.82
3	86	Φ2.73
4	48	Φ3.64
5	31	Φ4.55



Fold12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	12°	1550Lm
	> 90		3000K	34°	
			4000K	48°	


Sandy Black Sandy White

LIGHT DISTRIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	12054	Φ0.25
2	3013	Φ0.51
3	1339	Φ0.77
4	753	Φ1.03
5	482	Φ1.29



h(m)	E(lx)	Φ(m)
1	5127	Φ0.55
2	1282	Φ1.11
3	569	Φ1.67
4	320	Φ2.23
5	205	Φ2.78



h(m)	E(lx)	Φ(m)
1	3197	Φ0.84
2	799	Φ1.69
3	355	Φ2.54
4	199	Φ3.39
5	127	Φ4.24



Fold06




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	12°	790Lm
	> 90		3000K	34°	
			4000K	48°	


Sandy Black Sandy White

LIGHT DISTRIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	8025	Φ0.19
2	2006	Φ0.39
3	891	Φ0.59
4	501	Φ0.79
5	321	Φ0.99



h(m)	E(lx)	Φ(m)
1	2660	Φ0.57
2	664	Φ1.14
3	295	Φ1.72
4	166	Φ2.29
5	106	Φ2.86



h(m)	E(lx)	Φ(m)
1	1606	Φ0.85
2	401	Φ1.71
3	178	Φ2.57
4	100	Φ3.43
5	64	Φ4.29





Fold08




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
4W	> 80	< 3	2700K	Diffuse	280Lm
	> 90		3000K		
			4000K		

 Sandy Black  Sandy White


LIGHT DISTRIBUTION

3000K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	105.5	Φ2.60
2	26.3	Φ5.20
3	11.7	Φ7.80
4	6.5	Φ10.40
5	4.2	Φ13.00



Fold16




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	Diffuse	500Lm
	> 90		3000K		
			4000K		

 Sandy Black  Sandy White


LIGHT DISTRIBUTION

3000K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	236	Φ2.59
2	59	Φ5.19
3	26	Φ7.79
4	14	Φ10.39
5	9	Φ12.99



Fold32




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80	< 3	2700K	Diffuse	980Lm
	> 90		3000K		
			4000K		

 Sandy Black  Sandy White


LIGHT DISTRIBUTION

3000K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	234	Φ2.47
2	58	Φ4.95
3	26	Φ7.43
4	14	Φ9.90
5	9	Φ12.38





Washer13





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80 > 90	< 3	2700K 3000K 4000K	wallwasher	380Lm

Sandy Black Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

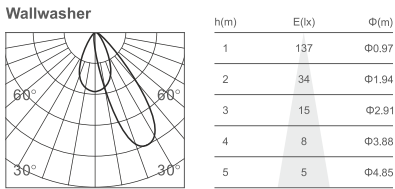

Out32





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
13W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	980Lm

Sandy Black Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

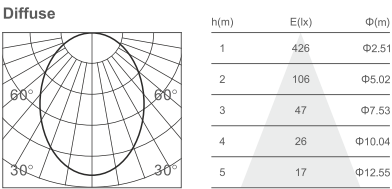

Washer27





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80 > 90	< 3	2700K 3000K 4000K	wallwasher	880Lm

Sandy Black Sandy White

LIGHT DISTRIBUTION

3000K 80Ra

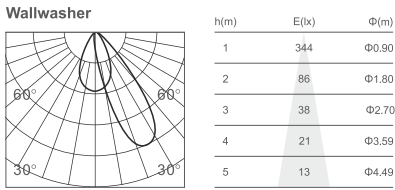

Out12





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
16W	> 80 > 90	< 3	2700K 3000K 4000K	12° 34° 48°	1550Lm

Sandy Black Sandy White


LIGHT DISTRIBUTION

3000K 80Ra

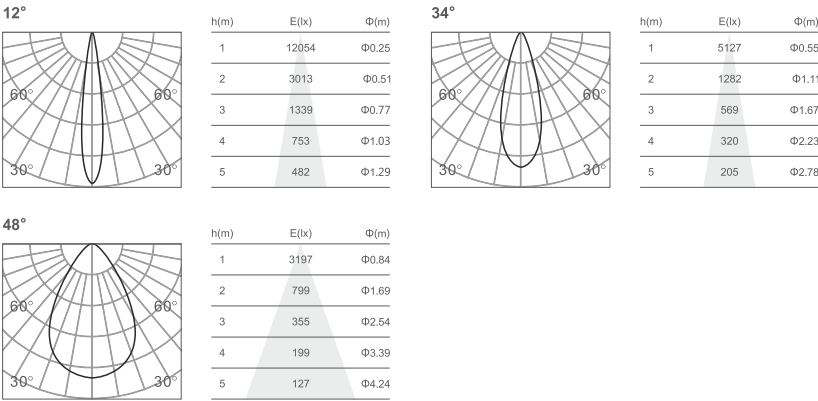

3 Adapters

Same spotlight heads + 3 kinds of adapters = 3 different system

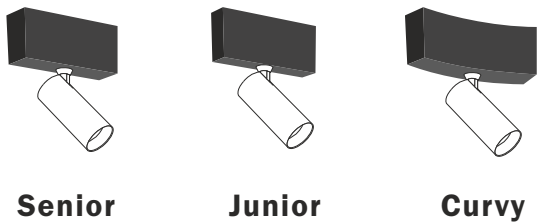

Spot



Pendant





Spot35





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 80	< 3	2700K	20°	440Lm
	> 90		3000K	30°	
			4000K	40°	
				60°	

Sandy Black Sandy White Golden

LIGHT DISTRIBUTION

3000K 80Ra

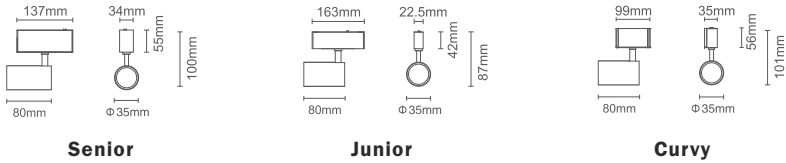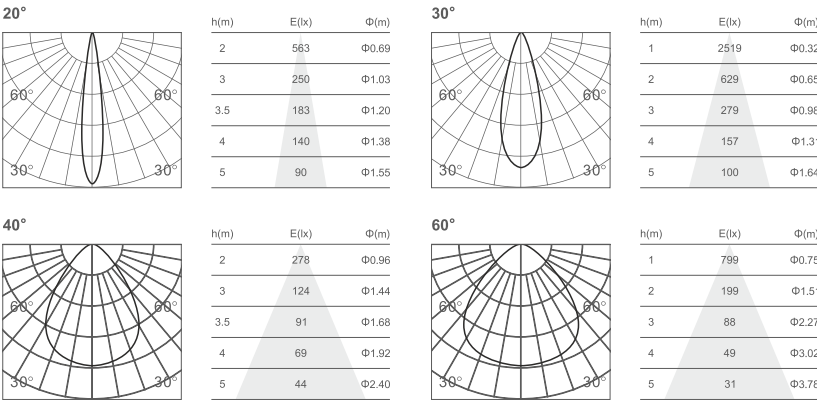

Spot35-T





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
2x5W	> 80	< 3	2700K	20°	880Lm
	> 90		3000K	30°	
			4000K	40°	
				60°	

Sandy Black Sandy White Golden

LIGHT DISTRIBUTION

3000K 80Ra

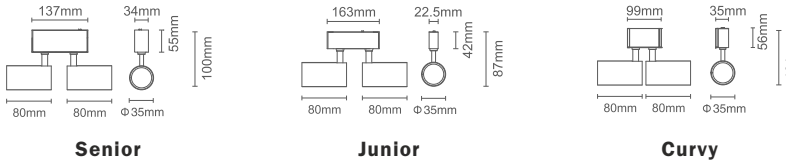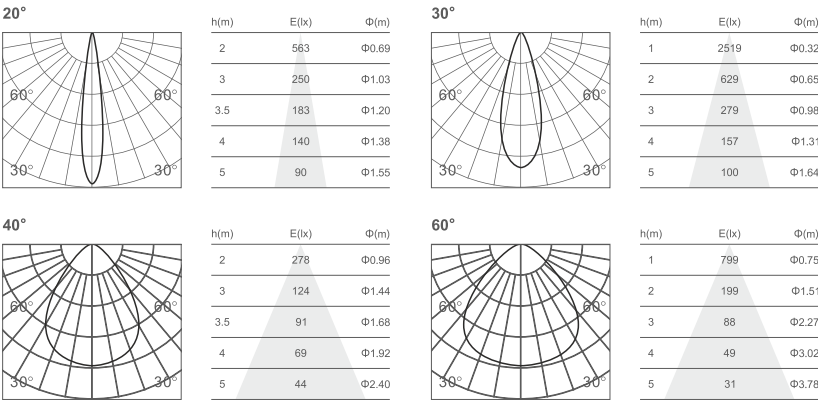





Spot50



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 80	< 3	2700K	18°	780Lm
	> 90		3000K	24°	
			4000K	36°	

Sandy Black Sandy White Golden

LIGHT DISTRIBUTION
3000K 80Ra

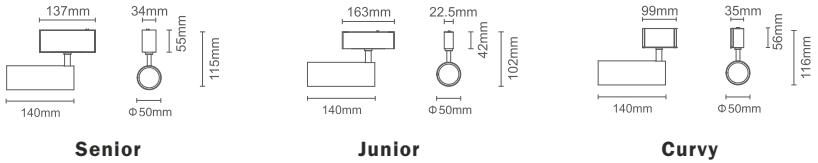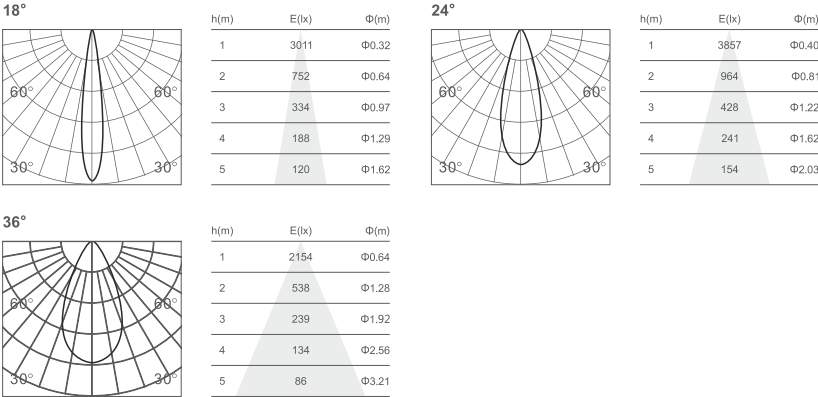



Spot65-R




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
8W	> 80	< 3	2700K	10°	405Lm
	> 90		3000K	20°	
			4000K	30°	


Sandy Black Sandy White

LIGHT DISTRIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
2	4203	Φ0.20
3	1051	Φ0.40
3.5	467	Φ0.61
4	262	Φ0.81
5	168	Φ1.02




h(m)	E(lx)	Φ(m)
1	2675	Φ0.26
2	668	Φ0.53
3	297	Φ0.80
4	167	Φ1.06
5	107	Φ1.33




h(m)	E(lx)	Φ(m)
2	699	Φ0.53
3	174	Φ1.06
3.5	77	Φ1.60
4	43	Φ2.13
5	27	Φ2.66



Senior



Junior



Curvy



Spot92-R




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
15W	> 80	< 3	2700K	10°	905Lm
	> 90		3000K	20°	
			4000K	30°	


Sandy Black Sandy White

LIGHT DISTRIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	10271	Φ0.19
2	2568	Φ0.38
3	1141	Φ0.58
4	641	Φ0.77
5	410	Φ0.97




h(m)	E(lx)	Φ(m)
1	4847	Φ0.30
2	1212	Φ0.60
3	538	Φ0.90
4	302	Φ1.20
5	193	Φ1.51




h(m)	E(lx)	Φ(m)
1	2371	Φ0.46
2	592	Φ0.92
3	263	Φ1.38
4	148	Φ1.84
5	94	Φ2.30



Senior



Junior



Curvy



Spot50-S




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 80	< 3	2700K	15°	600Lm
	> 90		3000K	24°	
			4000K	36°	


Sandy Black Sandy White

LIGHT DISTRIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	3011	Φ0.32
2	752	Φ0.64
3	334	Φ0.97
4	188	Φ1.29
5	120	Φ1.62



h(m)	E(lx)	Φ(m)
1	3857	Φ0.40
2	964	Φ0.81
3	428	Φ1.22
4	241	Φ1.62
5	154	Φ2.03



h(m)	E(lx)	Φ(m)
1	2154	Φ0.64
2	538	Φ1.28
3	239	Φ1.92
4	134	Φ2.56
5	86	Φ3.21

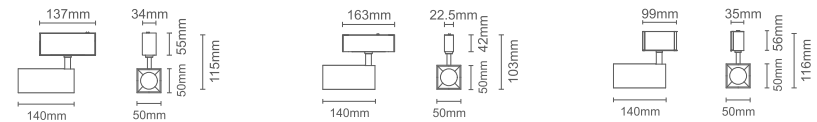

Senior

Junior

Curvy



Spot70




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
20W	> 80	< 3	2700K	15°	1450Lm
	> 90		3000K	24°	
			4000K	36°	


Sandy Black Sandy White

LIGHT DISTRIBUTION


3000K 80Ra




h(m)	E(lx)	Φ(m)
1	8050	Φ0.31
2	2012	Φ0.63
3	894	Φ0.95
4	503	Φ1.27
5	322	Φ1.59



h(m)	E(lx)	Φ(m)
1	5787	Φ0.47
2	1447	Φ0.95
3	643	Φ1.42
4	361	Φ1.90
5	231	Φ2.37




h(m)	E(lx)	Φ(m)
1	3344	Φ0.72
2	836	Φ1.44
3	371	Φ2.17
4	209	Φ2.89
5	133	Φ3.61

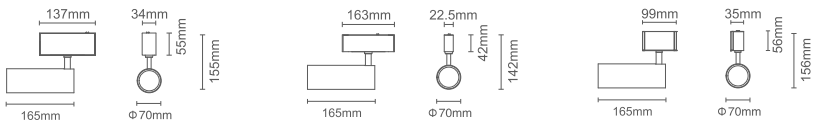

Senior


Junior

Curvy



Angle adjustment

Halo spot




Φ164mm




Φ120mm

Halo linear



Φ164mm



Φ120mm




Halo-D18




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
18W	> 80	< 3	2700K	24°	1750Lm
	> 90		3000K	34°	
			4000K	48°	

■ Sandy Black □ Sandy White

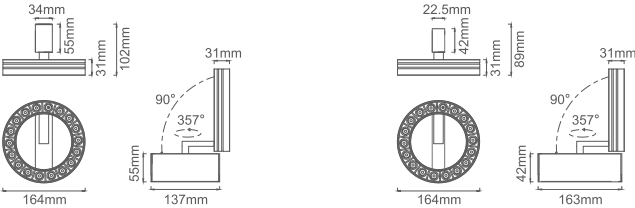

Senior

Junior



Curvy




Halo-L16




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
18W	> 80	< 3	2700K	Diffuse	950Lm
	> 90		3000K		
			4000K		

■ Sandy Black □ Sandy White

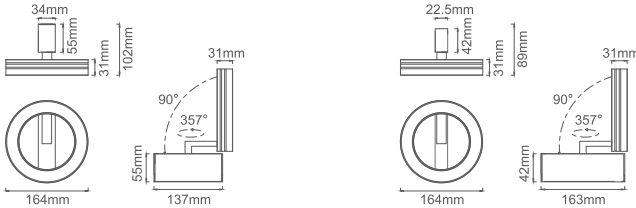

Senior

Junior



Curvy




Halo-D12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 80	< 3	2700K	24°	1150Lm
	> 90		3000K	34°	
			4000K	48°	


■ Sandy Black □ Sandy White



Senior



Junior



Curvy




Halo-L12




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
12W	> 80	< 3	2700K	Diffuse	650Lm
	> 90		3000K		
			4000K		


■ Sandy Black □ Sandy White



Senior



Junior



Curvy





Pendant35-R





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 80	< 3	2700K	20°	440Lm
	> 90		3000K	30°	
			4000K	40°	
				60°	

Sandy Black Sandy White Golden Black bronze

LIGHT DISTRIBUTION

3000K 80Ra

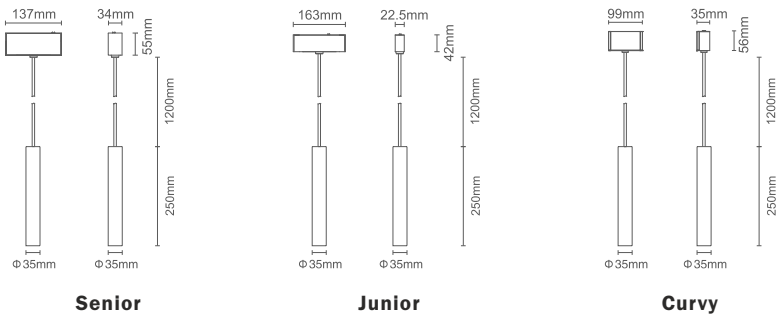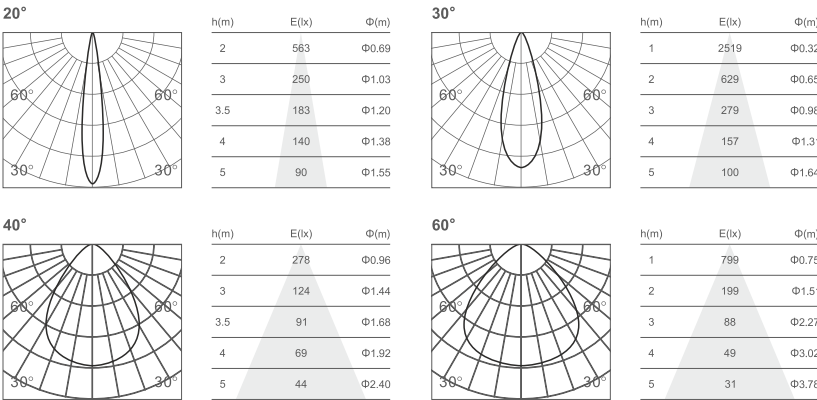

Pendant50-R





POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 80	< 3	2700K	18°	780Lm
	> 90		3000K	24°	
			4000K	36°	

Sandy Black Sandy White Golden Black bronze

LIGHT DISTRIBUTION

3000K 80Ra

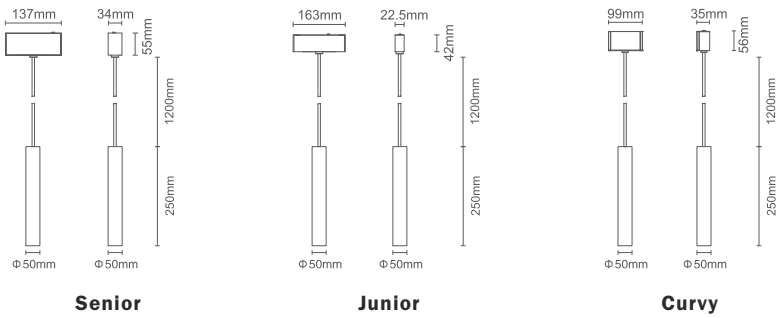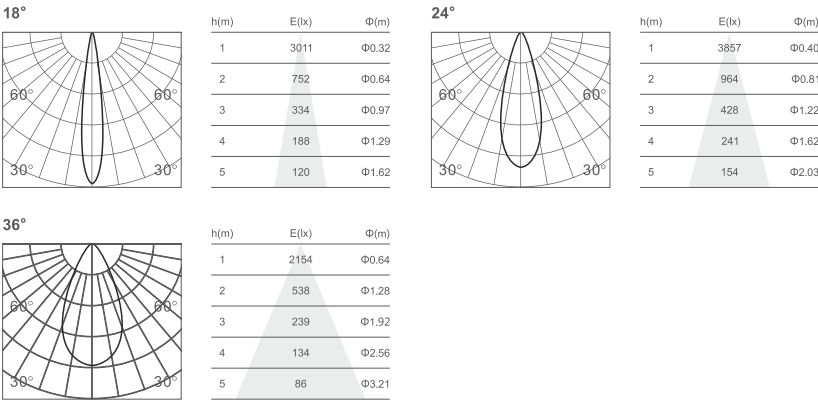





Pendant-glory



POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
10W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	480Lm

■ Sandy Black □ Sandy White

LIGHT DISTRIBUTION
3000K 80Ra

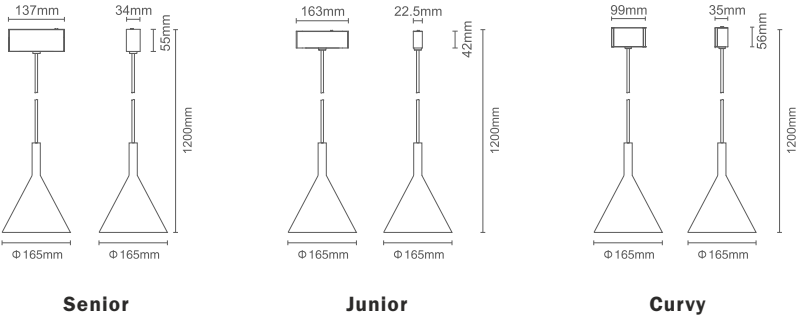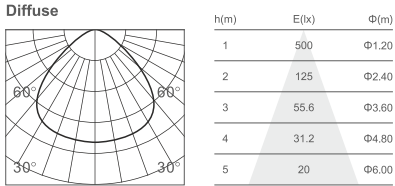



Pendant-global




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	290Lm

Sandy Black Sandy White


LIGHT DISTRIBUTION

2700K 80Ra


Diffuse




h(m)	E lx	Φ(m)
1	24	Φ2
2	6	Φ4
3	2	Φ6
4	1	Φ8
5	0.9	Φ10



Senior



Junior



Curvy



Global




POWER	CRI	SDCM	CCT	BEAM	LUMINOUS FLUX
5W	> 80 > 90	< 3	2700K 3000K 4000K	Diffuse	290Lm

Sandy Black Sandy White


LIGHT DISTRIBUTION

2700K 80Ra


Diffuse




h(m)	E lx	Φ(m)
1	24	Φ2
2	6	Φ4
3	2	Φ6
4	1	Φ8
5	0.9	Φ10



Senior



Junior



Curvy