PR-BL01 BOLLARD LED LIGHT







SPECIFICATIONS

Model No.	PR-BL01-014		PR-BL01-024				
Power Consumption(±10%)	14W		24W				
Power Supply	Weledpower						
Input Voltage	120-277 VAC , 50 / 60 Hz						
Power Factor	>0.9						
Surge Protection	2kV line-line, 2kV line-earth						
Driver Type	Constant Current (CC)						
Control	0-10V dimmable						
LED Type	LED 3030						
Luminous Flux (±10%)	1680lm 2880lm						
Efficacy(4000K Ra70)	120lm/W (R03203)						
Correlated Color Temperature	4000K (3000K, 5000K optional)						
Color Rendering Index	Ra70 (Ra80 optional)						
Beam Angle	R03203 (Type V)						
UGR level	NA						
Product Dimension	Ф165×500mm (Ф6.5"×19.69")	Ф165×900mm (Ф6.5"×35.43")	Φ165×500mm (Φ6.5"×19.69")	Ф165×900mm (Ф6.5"×35.43")			
Luminaire Net Weight	4.5±0.3kg (9.92±0.66Lbs)	6.16±0.3kg (13.58±0.66Lbs)	4.5±0.3kg (9.92±0.66Lbs)	6.16±0.3kg (13.58±0.66Lbs)			
Mounting Option	Mounting kit with anchor bolts						
Material	Aluminum Body, Polycarbonate Optical Lens						
Finish	Powder Coating						
Fixture Color	Black						
EPA	NA						
IK Rating	IK10						
IP Rating	IP66						
Operating Temperature	-30°C to + 50°C(-22°F to 122°F)						
Life Time of LED @Ta=25°C	50000 Hours						
Warranty	5 Years						
Application	Pathway, Gardens, Sidewalks, Building entrance, etc.						
Accessories	Visor						


DESCRIPTION

BL01 is an innovative bollard light which enhance the aesthetic and creative of city in IP66, thanks to its architectural design and UV resistant PC material to accommodate the demands of different areas in pathway, gardens, sidewalks, building entrance, etc.





DIMENSIONS, PHOTOMETRIC DATA, MOUNTING KIT

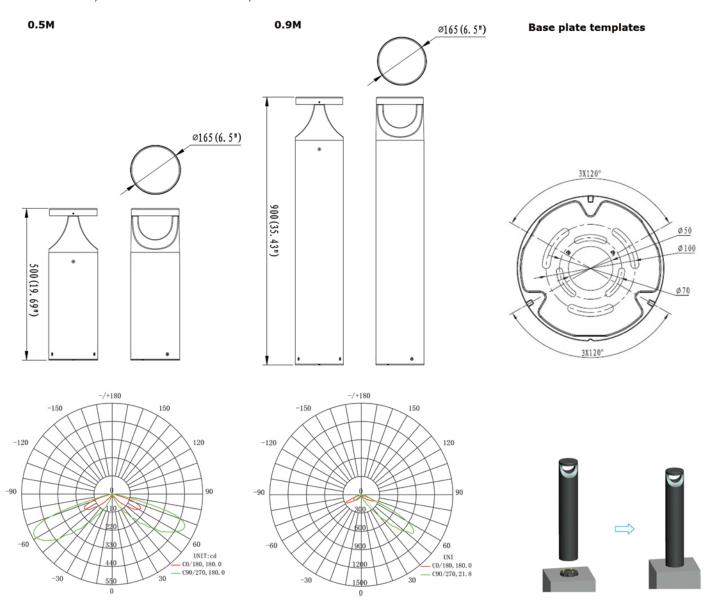

ACCESSORIES





Round House Side Shield To reduce glare light Code: BC-B01-02



Terminal Box

Code: CK-B01-01

ORDERING INFORMATION

EXAMPLE:PR-BL01-14-4000-80-900-S

SERIES	POWER(W)	CCT(K°)	CRI	HEIGHT(MM)	LIGHT DIST.
PR-BL01	14	3000	70	500	S: SYMMETRICAL
	24	4000	80	900	A: ASYMMETRICAL
		5000			

