



HR02


HANDRAIL LED LIGHT SERIES - SYMMETRICAL

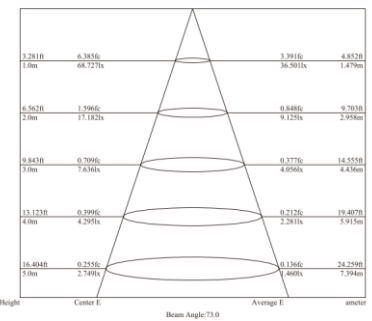

DISTRIBUTION

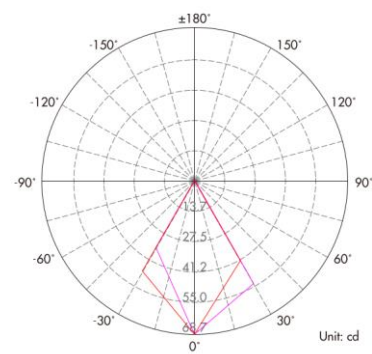

DIMENSIONS

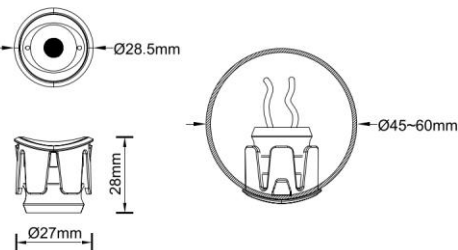

SPECIFICATIONS

Power	1.4 Watts +10%
LED type	1 PC CREE XPE LED
Luminous flux	100 lm +10%
CCT	2700K,3000K,4000K,6000K
CRI	80+
Beam angle	70° symmetrical beam
Dimension	with clips.:28.5 x 28 (mm) /Without clips: 24.5 x28 (mm) Diameter x Height
Cut out	27 mm
Net weight	0.048kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC12V- DC24V
Insulation class	Class III
Cable	1PC teon cable 0.25M 2*0.3mm square
Driver	Low constant voltage input, constant current output for LED
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK06
Housing	Stainless steel 304 housing or Aluminium housing
Protection finishing	SS304 or anodizing for Aluminium
Trim	Stainless steel 304 housing or Aluminium housing
Glass	/
Loading capacity	/
Cable Gland	/
Gasket	O-ring PMQ silicone seal
Accessories	
Terminal	PC spring for recessed installation
Base	SS304 clip for taking off the xture from the handrail

