


PR-LS-LR01


IN GROUND LINEAR RECESSED



DISTRIBUTION

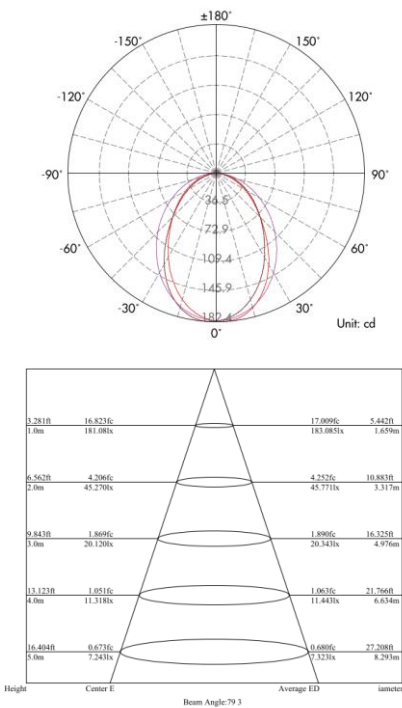

DIMENSIONS

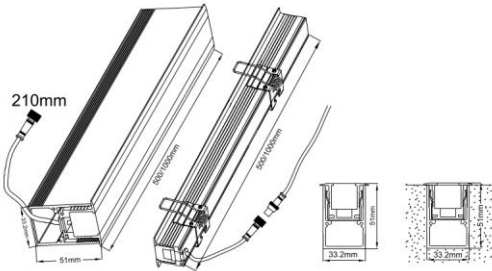

SPECIFICATIONS

Power	24 Watts (12 watts as options)
LED type	198 PCS 2835 SMD LED
Luminous flux	1200~1350 lm (500~560lm for 12 watts)
CCT	2700K, 3000K, 4000K, 6000K, R/G/Y/B
CRI	80+
Beam angle	120°
Dimension	1000 x 33.2 x 51 (mm) Length x Width x Height (0.5 mersters version as options)
Cut out	1000 x 33.2 x 51 (mm) Length x Width x Height
Net weight	1.720 kgs
Warranty	3 years
Certifications	CE, RoHS
Electrical Data	
Input voltage	DC24V (With a separately driver as options)
Insulation class	Class III
Cable	2 x cable 1.5cm H05RN-F 2x0.75mm square with IP67 waterproof connector male +female.
Driver	Low voltage constant current output, excluding the transformer
Construction Data	
IP rating	IP67 Waterproof
IK rating	IK08
Housing	Passivated(Anodizing) Aluminum
Protection finishing	20~25µm thickness anodized film for housing. Dark grey
Trim	Passivated(Anodizing) Aluminum
Glass	Without glass, but with strong PMMA diffuser
Loading capacity	200 kgs
Cable Gland	Glue
Gasket	/
Accessories	
Mounting Sleeve	Passivated (Anodizing) Aluminum CNC machined. Dark grey. With 2 PCS clips for mounting sleeve.
Others	2 PCS springs for ceiling lights applications, and 2 PC end caps with screws

