


LD11820






SPECIFICATIONS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent /Opal
Power:	30W/m
Input voltage:	24VDC
Lamp beads:	120LEDs/m (2835)
Lighting source width:	18mmX3
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor li

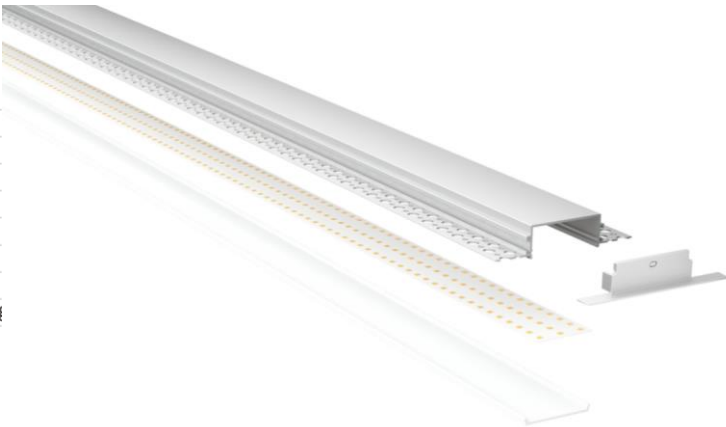

DIMENSIONS & ACCESSORIES



COVER






Diffuser:72724

ENDCAP



Hole:118208
W/O hole: 118209

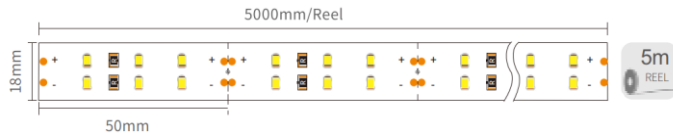

CONNECTION DIAGRAM




6214-90°-2


CONNECTION DIAGRAM




APPLICATIONS

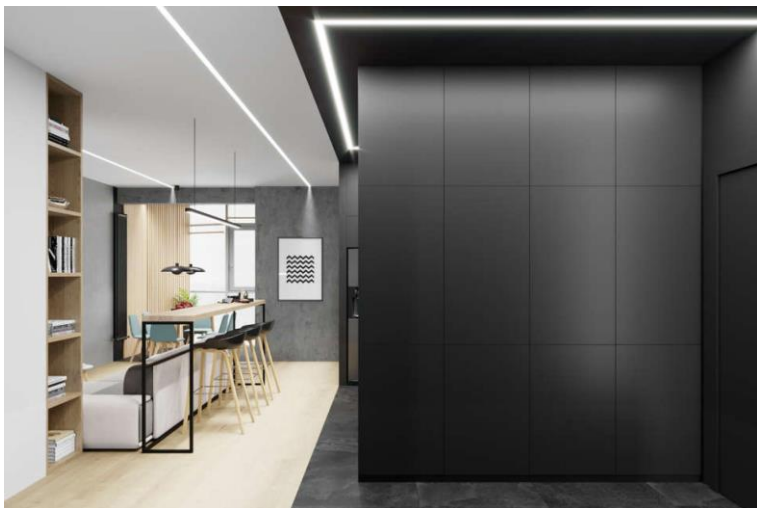


6214-180°




CONNECTION DIAGRAM



6214-90°-1



CONNECTION DIAGRAM



PREMIER

3740 William St, Burnaby, BC V5C 3H7

Phone: +1 (604) 294-2334, Toll free: +1 (877) 294-2334, Fax: +1 (604) 294-2126

www.premierlight.ca

LD4343

Last update: Sep. 2023

Page 1 of 1