




LD8820



SPECIFICATIONS:

Material:	AL6063-T5
Surface:	Anodized/ Painting
PCover:	Diffuser /Transparent /Opal
Power:	20W/m
Inputvoltage:	24VDC
Lampbeads:	120LEDs/m (2835)
Lightingsourcewidth:	28mm
Availablelengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

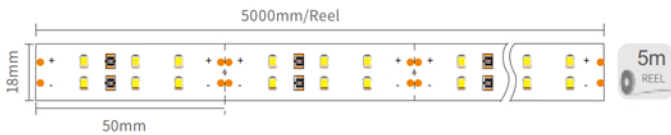

COVER




Diffuser:50354

ENDCAP





Hole:98208
W/O hole: 98209

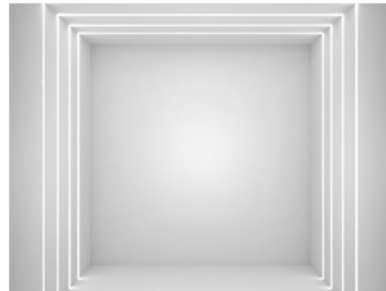



6214-90°-2



APPLICATIONS:

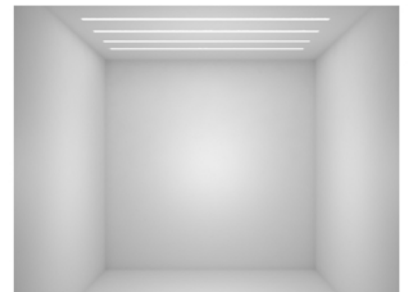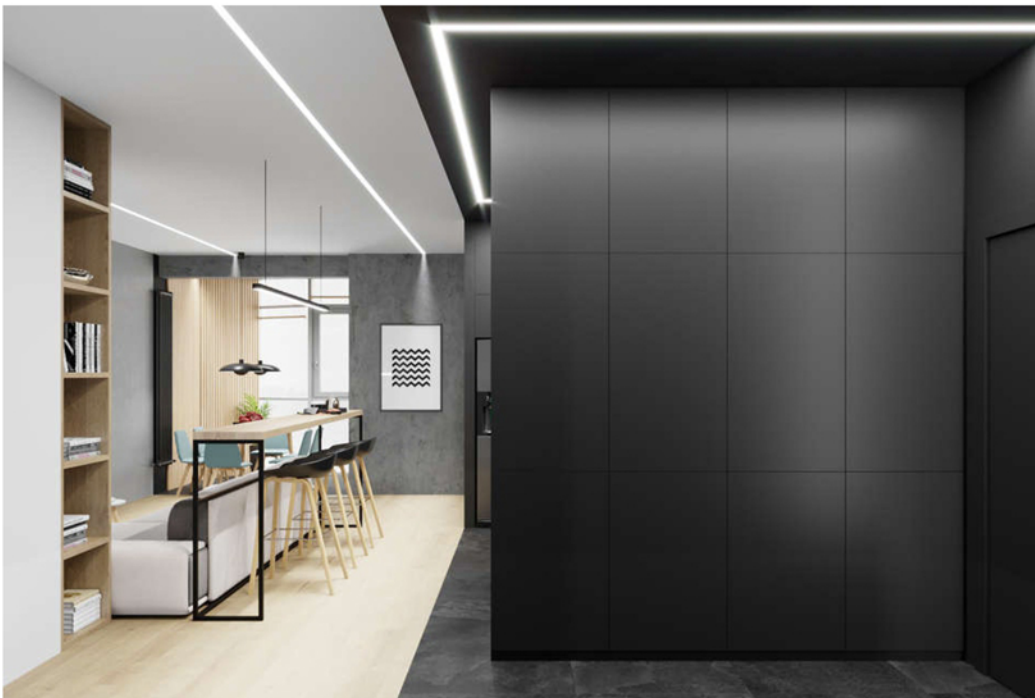

6214-180°

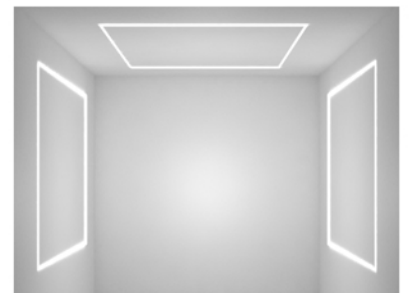

6214-90°-1

PREMIER

3740 William St, Burnaby, BC V5C 3H7

Phone: +1 (604) 294-2334, Toll free: +1 (877) 294-2334, Fax: +1 (604) 294-2126

www.premierlight.ca

LD8820
LAST UPDATE: JULY, 2023
PAGE 1 of 1