

LINEAR16-D9

MAGNETIC TRACK SERIES - CURVY




SPECIFICATIONS

Model No.	Linear16-D9
Power Consumption(±10%)	8W
Input Voltage	24VDC
Driver Type	Constant Current (CC)
Dimming	Yes
Luminous Flux (±10%)	500
Efficacy(4000K Ra70)	63lm/W
Correlated Color Temperature	4000K (2700, 3000K, 5000K optional)
Color Rendering Index	Ra80 (Ra90 optional)
Beam Angle	Diffuse
UGR level	NA
Mounting Option	Track Mounted
Material	Aluminum Alloy Body, Polycarbonate Optical Lens
Finish	Powder Coating
Fixture Color	Black/White
EPA	NA
IK Rating	NA
IP Rating	IP20
Life Time of LED @Ta=25°C	50000 Hours
Warranty	5 Years
Application	Residential, Retail, Office, etc.

DISTRIBUTION



3000K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	119	Φ 2.56
2	29	Φ 5.12
3	13	Φ 7.68
4	7	Φ 10.24
5	4	Φ 12.81

DIMENSIONS

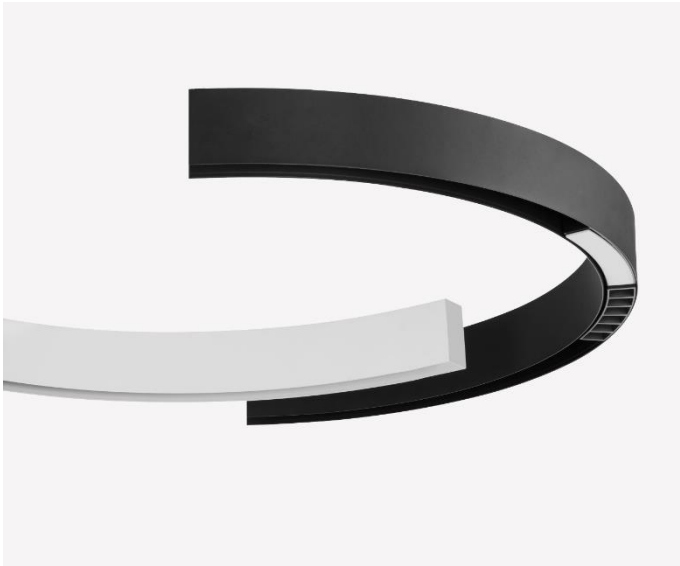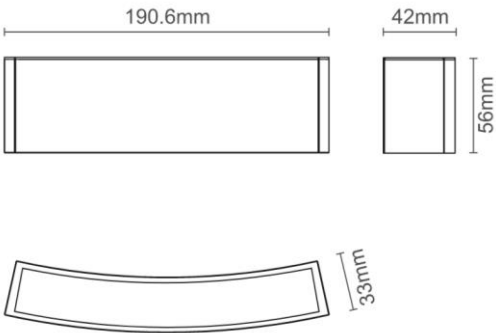

3740 William St, Burnaby, BC V5C 3H7
Phone: +1 (604) 294-2334, Toll free: +1 (877) 294-2334, Fax: +1 (604) 294-2126
www.premierlight.ca

Curvy Magnetic Track -Linear16-D9
Last update: Sep. 2023
Page 1 of 1