


PT01


POST MOUNTED LED LIGHT



DISTRIBUTION

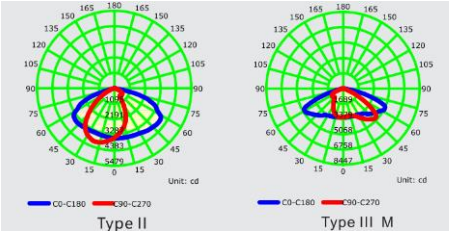

DIMENSIONS

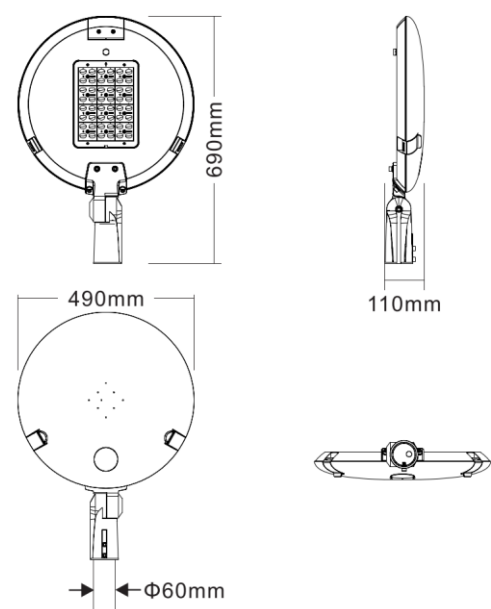

SPECIFICATIONS

Model No.	PT-01
Power Consumption(±10%)	20W up to165W
Input Voltage	120VAC
Driver Type	NA
Dimming	Yes
Efficacy(4000K Ra70)	165lm/W
Correlated Color Temperature	4000K (3000K, 5000K optional)
Color Rendering Index	70/80
Beam Angle	
UGR level	NA
Mounting Option	Post Mount
Material	High pressure die-casting aluminium, super white tempered glass
Finish	Powder Coating
Fixture Color	Black/Grey
EPA	NA
IK Rating	IK09
IP Rating	IP66
Operating Temperature	-40°C to +55°C
Life Time of LED @Ta=25°C	50000 Hours
Warranty	5 Years
Application	Outdoor, landscape, Parks, Roads

