

BL-08

LANDSCAPE BOLLARD

SPECIFICATIONS

Model No.	BL-08	
Power Consumption(±10%)	15W	25W
Input Voltage	120VAC	
Luminous Flux (±10%)	1650lm(R02001)/ 1575lm(R02002)	2750lm(R02001)/ 2625lm(R02002)
Efficacy(4000K Ra70)	110lm/W(R02001)/ 105lm/W(R02002)	110lm/W(R02001)/ 105lm/W(R02002)
Correlated Color Temperature	4000K (3000K, 5000K optional)	
Color Rendering Index	>70	
Total Flux at and above 90°	R02001(Type V), R02002(Type IV)	
Dimming	Yes	
Control	PIR Sensor/Dimming/Photocell	
Material	Aluminum body, PC lens with UV filter	
Finish	Powder Coating	
Fixture Color	Black	
Luminaire Net Weight	4.5kg (9.92Lbs)/6.7kg (14.77Lbs)	
Product Dimension	Ø135×500mm (Ø5.31"×19.69")/ Ø135×1092mm (Ø5.31"×43")	
IP Rating	IP66	
IK Rating	IK10	
Working Temperature	-30°C to +45°C	
Life Time of LED @Ta=25°C	50000 Hours	
Warranty	5 Years	
Application	Outdoor application such as pathways, parks, etc	



ACCESSORIES



Backfilled Anchor
Q235 +SPCC, hot dip galvanizing
Φ130x508mm.

Code: MT-B01-03



PREMIER

3740 William St, Burnaby, BC V5C 3H7
Phone: +1 (604) 294-2334, Toll free: +1 (877) 294-2334, Fax: +1 (604) 294-2126
www.premierlight.ca


Landscape Bollard- BL08
Last update: Oct. 2023
Page 1 of 2

BL-08


LANDSCAPE BOLLARD

DISTRIBUTION

15W beam angle




R02001




R02002

25W beam angle




R02001




R02002

DIMENSIONS

19.69 inch 15W/25W

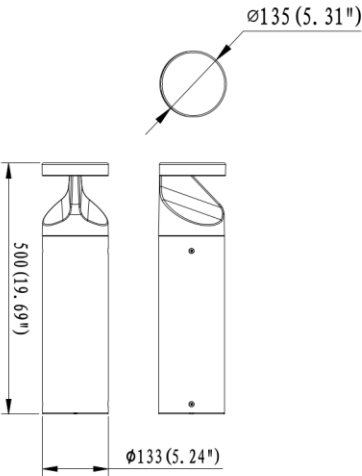

43 inch 15W/25W

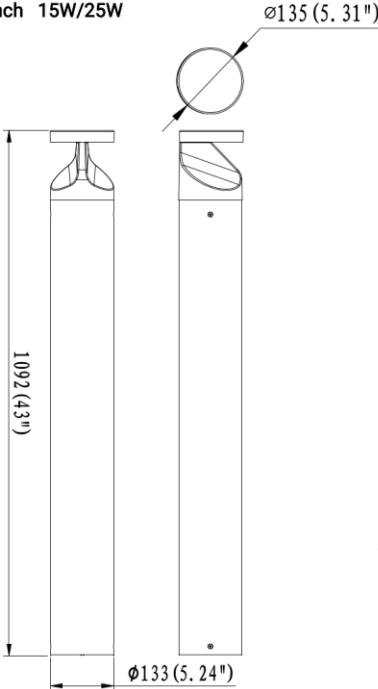

Base plate template

Unit:mm/inch

