


FL02


OUTDOOR FLOOD LIGHT




DIMENSIONS

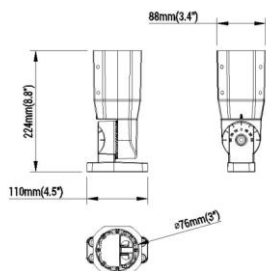

Ø76mm Slipfitter

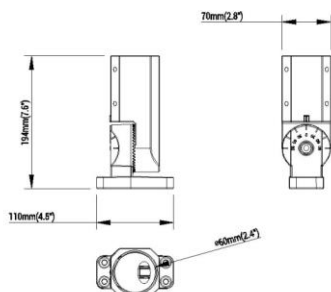


Ø60mm Slipfitter




Wall Mount

SPECIFICATIONS


Model No.	FL02-075	FL02-100	FL02-120	FL02-150	FL02-200	FL02-240	FL02-300
Power Consumption(±10%)	75W	100W	120W	150W	200W	240W	300W
Power Supply	S0SEN						
Input Voltage	120-277 VAC , 50 / 60 Hz						
Power Factor	>0.9						
Driver Type	Constant Current (CC)						
Control	Photocell Control, Dimmable and Non-Dimmable						
LED Type	LED 2835						
Luminous Flux (±10%)	2100lm	15000lm	18000lm	22500lm	30000lm	36000lm	45000lm
Efficacy(4000K Ra70)	150lm/W						
Correlated Color Temperature	3000K, 4000K, 5000K adjustable						
Color Rendering Index	Ra70 (Ra80 optional)						
Beam Angle	F00402 (7H×6V), F00403 (7H×6V)						
UGR level	NA						
Product Dimension	233x187x141mm (8.8"x7.4"x5.6")				469x187x185mm (18.5"x7.4"x7.3")		
Luminaire Net Weight	3.4kg (7.48Lbs)				7.9kg (17.38Lbs)		
Mounting Option	Adjustable angle mounting (sleeve mounting, wall mounting)						
Material	Aluminum Alloy Body, Polycarbonate Optical Lens						
Finish	Powder Coating						
Fixture Color	Black, Bronze						
IK Rating	IK08						
IP Rating	IP66						
Operating Temperature	-30°C to + 50°C(-22°F to 122°F)						
Life Time of LED @Ta=25°C	50000 Hours						
Warranty	5 Years						
Application	Building exteriors, Courtyard						
Accessories	Optional photocell						

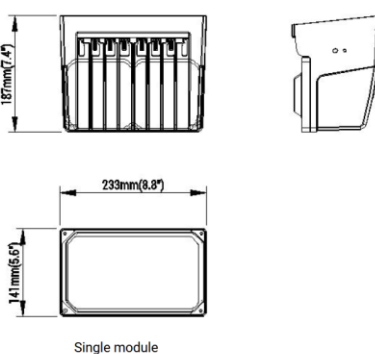


Single module



Single module Yoke Mount

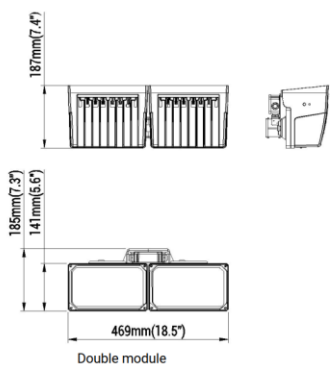

Double module

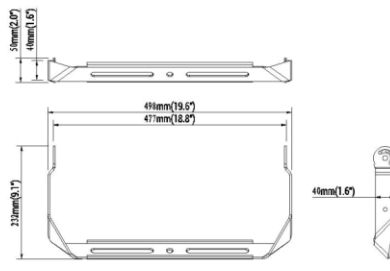


Double module Yoke Mount




MOUNTING OPTIONS



DISTRIBUTION



F00402 (7Hx5V)



F00403 (7Hx6V)

ACCESSORIES



NEMA socket
ANSI C136.41-2013 Dimming Receptacles, 3pin
Code: NS-A00-02(for 3pin)



Photocell control
ANSI C136.10-1996 Twist Lock for On-Off function only
Code: PS-A00-01



Shorting cap
Cover NEMA socket when the photocell is not used.
Code: NS-A00-01



Slipfitter
Adjustable angle mounting bracket with 60mm sleeve
Code: SP-F45-01



Slipfitter
Adjustable angle mounting bracket with 76mm sleeve
Code: SP-F45-02



Wall Mount
Can Be used for wall mounting
Code: BC-F45-01



Yoke Mount
For single module mounting bracket
Code: BC-F45-02



Yoke Mount
For double module mounting bracket
Code: BC-F45-03

